

v. 1.0.0
DATASHEET

GATEWAY OUTDOOR



Born to be smart

Urbana Gateway is a Plug&Play device for smart city applications.

The device incorporates multifunctional interfaces which are able to connect a wide range of devices to Urbana IoT Platform.

Urbana Gateway is a Plug&Play device for integrating any sensor and actuator into Urbana IoT Platform.

Connect any sensor and actuator using world class technologies

The device deploys LoRa® radio technology for last mile communication. It can operate on 868/915 MHz frequencies with coverage radius up to 5 Km for indoor scenarios and up to 15 Km for outdoor. LoRa technology provides the highest performances for radio communication in terms of reliability, scalability and obstacles penetration with low power consumption.

Multi standard device




Connectivity has never been so simple. Thanks to the several interfaces used into Urbana Gateway, you can easily connect your IoT solutions in a while.

Real-time optimization through Urbana IoT Platform

All supervised devices can be controlled in real-time.

DEVICE DIMENSION

Device dimension in mm

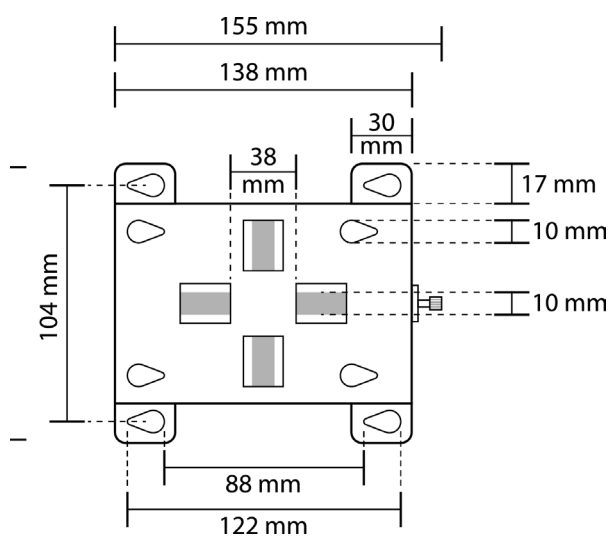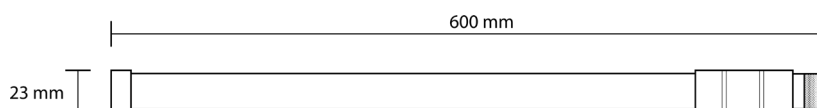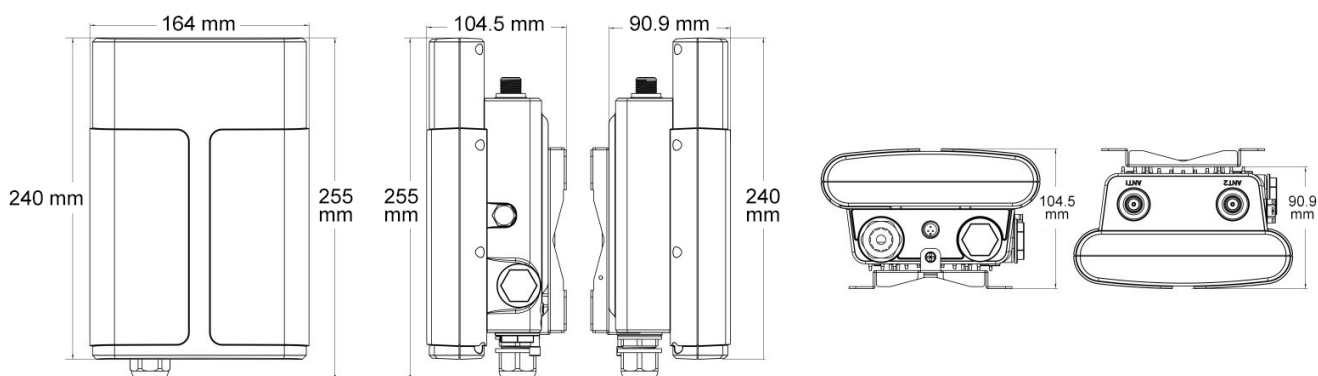

TECHNICAL SPECIFICATION

MECHANICAL

Housing:	Solid Case
Material:	Plastic
Dimension:	250 x 172 x 92 mm (without antenna)
Mounting:	Wall or Pole Mounting

HARDWARE

CPU:	Quad-core 1.5 GHz, 64-bit ARM Cortex-A53
Memory:	512 MB DDR4 RAM
Flash:	8 GB eMMC

ELECTRICAL

Power Source:	802.3 af PoE input or 12 VDC with M12 Connector
Input Power (Max):	Typical 3.6W, Max 4.8W

ENVIRONMENT

Operating Temperature:	- 40°C to + 70°C (- 40°F to + 158°F) Reduced Cellular Performance above 60°C
Storage Temperature:	- 40°C to + 85°C (- 40°F to + 185°F)
Operating Relative Humidity (Max):	0% a 95% (non-condensing) to 25°C/ 77°F
IP Rating:	IP67
Certification:	CE, FCC

LORAWAN® INTERFACE

Connector:	2 × 50 Ω N-Female
Channel:	8
Frequency Band:	CN470/IN865/EU868/RU864/US915/AU915/ KR920/AS923
Sensitivity:	- 140 dBm Sensitivity @292bps
Output Power (Max):	27 dBm Max
Protocollo:	V1.0 Class A/Class C + V1.0.2 Class A/Class C

ETHERNET INTERFACE

Port:	1×RJ45 (PoE PD Supported)
Physical Layer:	10/100/1000 Base-T (IEEE 802.3)
Data Rate:	10/100/1000 Mbps (Auto-Sensing)
Interface:	Auto MDI/MDIX
Mode:	Full or Half Duplex (Auto-Sensing)

WIFI INTERFACE

Standard:	IEEE 802.11 b/g/n
Antenna:	Internal
Mode:	AP or Client
Security:	WPA/WPA2 Autentification, WEP/TKIP/AES Encryption
Power Transmission:	802.11b: 18dBm +/-2.0 dBm (11 Mbps) 802.11g: 15 dBm +/-2.0 dBm (6 Mbps) 802.11g: 15 dBm +/-2.0 dBm (54 Mbps) 802.11n@2.4 GHz: 14 dBm +/-2.0 dBm (MCS0_HT20) 802.11n@2.4 GHz: 14 dBm +/-2.0 dBm (MCS7_HT20) 802.11n@2.4 GHz: 13 dBm +/-2.0 dBm (MCS0_HT40) 802.11n@2.4 GHz: 13 dBm +/-2.0 dBm (MCS7_HT40)

CELLULAR INTERFACE

Antenna:	Internal
Slots Sim:	x1 mini SIM-2FF

CONFIGURATION

Plug&Play using Urbana IoT Platform

SOFTWARE


Network Protocols:	PPPoE, SNMP v1/v2c/v3, TCP, UDP, DHCP, DDNS, HTTP, HTTPS, DNS, ARP, SNTP, Telnet, SSH, MQTT, ecc.
VPN Tunnel:	OpenVPN/ IPsec/ PPTP/ L2TP/ GRE/ DMVPN
Access Authentication:	CHAP/ PAP/ MS-CHAP/ MS-CHAPV2
Firewall:	ACL/ DMZ/ Port Mapping/ MAC Binding/ URL Filter
Management:	Web, CLI
Reliability:	WAN Failover

COMPLIANCES

Council Directive	2014/53/EU
--------------------------	------------

URBANA IoT PLATFORM

Urbana platform is designed to provide end-to-end IoT solutions from hardware to software. The core structure of the platform is based on a scalable distributed and containerised infrastructure maintaining the requirements of clients to scale up whenever needed. The tech stack used in Urbana allows us to have no restriction based on number of devices, features, users and availability. With use of these highly scalable and available databases, Urbana IoT Platform is able to provide advanced reporting and fallback mechanism to provide high level of reliability. One of the most important components of the Urbana IoT Platform is the MQTT broker (server). The MQTT layer is the gate that connects the cloud-based part of the infrastructure to the local field network of devices. It plays a critical role both in terms of security and scalability but also in terms of interoperability. Urbana infrastructure can interface with any device compliant with LoRaWAN® network protocol as standardized by the LoRa Alliance®. Urbana Smart Solutions, being an end-to-end provider, have in-house LoRaWAN® gateways readily for the clients if needed, which are Plug&Play compliant with all the Urbana devices.

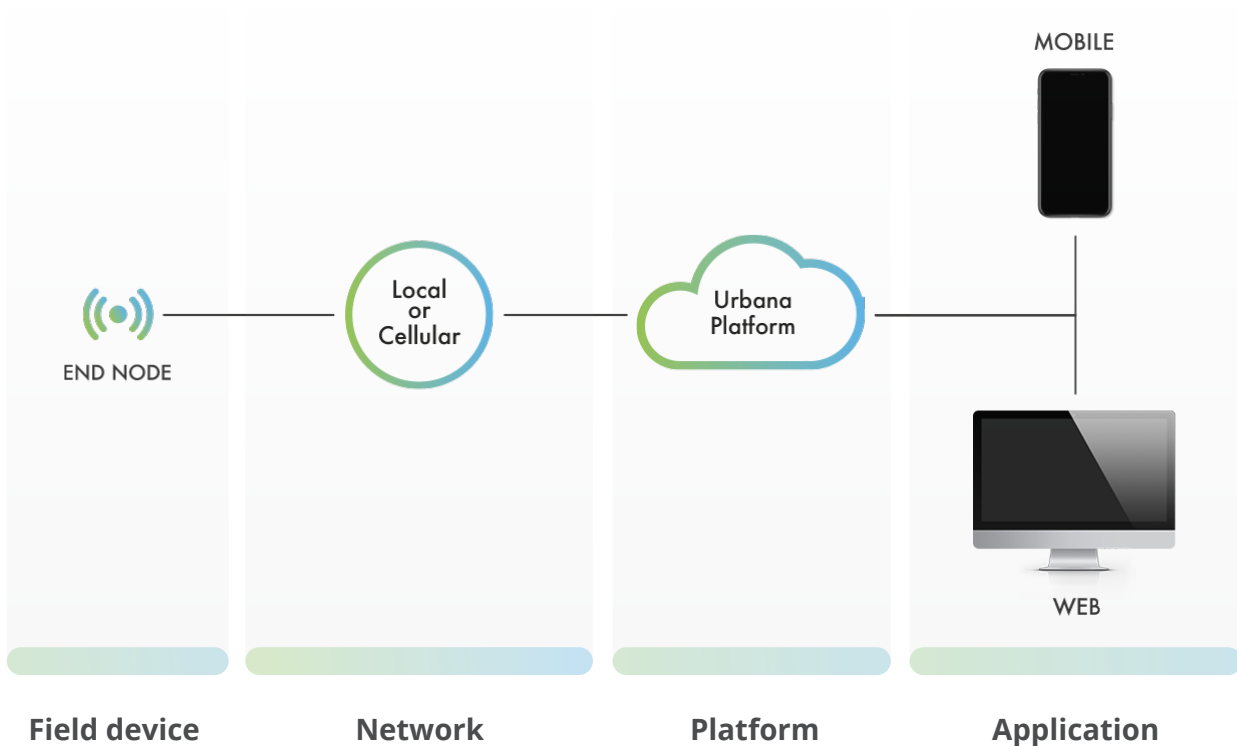

Gateway Indoor - GI03
Datasheet

CONTACT US

info@urbanasmart.com

urbanasmart.com



EUROPE

Italy

Via Bruno Maderna 7
30174 Mestre
Venice - Italy
Tel. +39 041 2689294

ASIA

Singapore

6 Shenton Way # 22-00 OUE
Downtown 068809
Tel : (+65) 6562255055
Fax : (+65) 6562255303